

RITE® SERIES 210 SINGLE DOOR WAFER TYPE SWING CHECK VALVE SEAT RING HARD SEAT



OVERVIEW

The Rite® Series 210 wafer combination swing check valves are flow activated and Rite® Sized. The Rite® Series Check Valve inlet ports and disc have been shape optimized to achieve a fully open position at low flow rates (3 ft/s on average).

SPECIFICATIONS

Size Range	NPS 1" to 60" 25mm to 1500mm
Temperature Range	Cryogenic to High Temperature (Pending Materials Selected)
Operating Pressure	ASME (125, 150, 300) DIN (PN10, 16, 25, 40)
Body Style	One-Piece Wafer Body Seat Ring Type
Leakage Rate	API 598

APPLICATIONS

- > Chemical Processing
- > Electrolysis
- > Facilities/Skid
- > HVAC
- > Marine
- > Nuclear
- > Oil Transport
- > Petrochemical
- > Power Generation
- > Refrigeration
- > Storage & Transport
- > Tank Trucks
- > Water

MEDIA

- > Acids
- > Alkalis
- > Corrosive Chemicals
- > Dry Chlorine (Gas or Liquid)
- > Gases
- > Hydrogen
- > Oxygen
- > Water

DESIGN FEATURES

The Series 210 hard seated check valves offer:

SINGLE DOOR DESIGN:

Below numbered list can be referenced on various figures throughout document

- 1 Combination design utilizing both gravity + spring makes the valve easy to open/close, reducing water hammer.
- 2 Limited movement of internal parts during operation extends service life.
- 3 Elliptical inlet shape designed to accelerate line media through the valve.
- 4 Optimal diameter for high flow capacity.
- 5 Short face to face reducing weight and space between flanges.
- 6 Low cracking pressure design.
- 7 Quick response time (ideal for process lines with varying flows & control valves).
- 8 Customizable modular design, allows for adding special accessories to meet customer application requirements.
- 9 Cost & energy efficiency, requiring only one set of flange studs which span the valve, reducing in-service vibration.
- 10 Higher grade material as standard on seat ring type design enhances life expectancy.

Figure 01: Seat Ring Hard Seat Cutaway Front View.

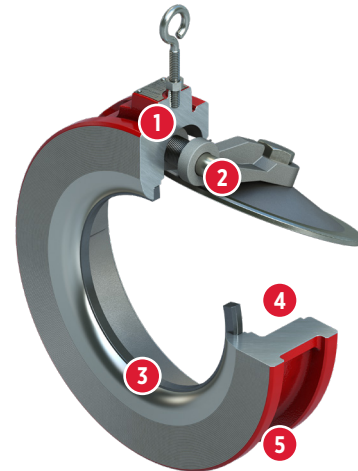


Figure 02: Seat Ring Hard Seat Cutaway Rear View.



**RITE® SERIES 210
SINGLE DOOR WAFER TYPE SWING CHECK VALVE
SEAT RING HARD SEAT**



DESIGN STANDARDS

Valve Design	ASME B16.34
Accessories Available	H100, SA01, SA1, SA2, SA3, SA4, SA4A, SA6, SA7, SA10, SA16, SA40, SA40A, SA50, etc.
Testing Standard	ASME B16.34, API 598
Face-to-Face	Manufacturer's Standard

CERTIFICATIONS AND APPROVALS

Certifications	CE/PED CRN
Approvals	NSF-61

Additional information is available in the Bray Rite® Ltd. Technical Sales Manual.

Figure 03: Seat Ring Hard Seat Exploded View.


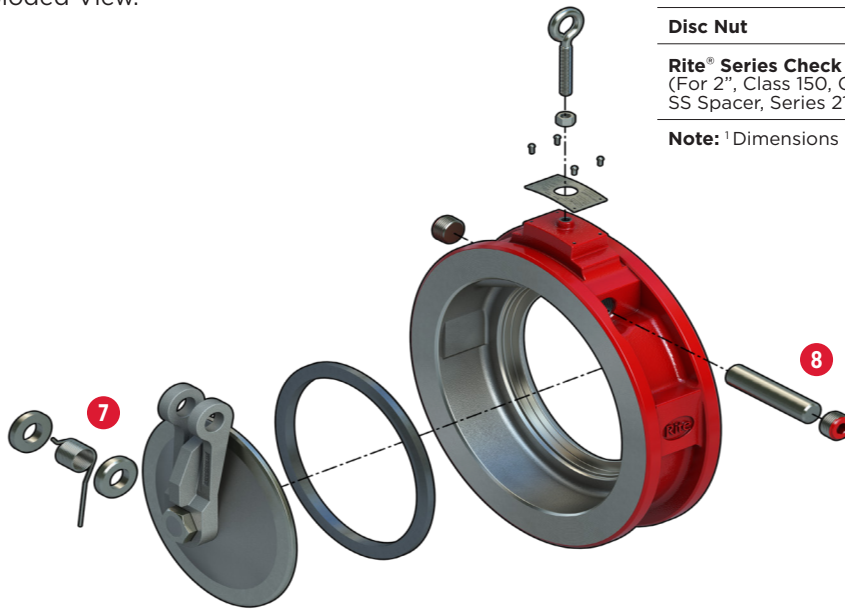


Figure 04: Seat Ring Hard Seat In-Pipe View.

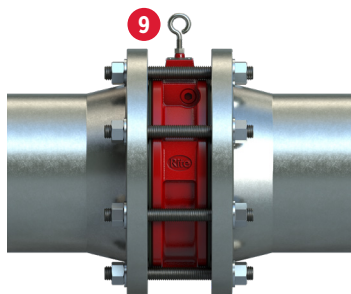

MATERIAL OPTIONS¹

Body Material determines whether design is integral type, or seat ring type. See below chart:

	Carbon Steel (ASTM A216 WCB)
Body	Cast Iron (ASTM A126 CLB) Ductile Iron (ASTM A395)
Hinge	Stainless Steel (ASTM A351 CF8M)
Seat Ring	Stainless Steel (ASTM A240 304), Stellite overlay optional
Spring	Valve size: <12": Stainless Steel (ASTM A313 316) standard duty Valve size: ≥14"+: Stainless Steel (ASTM A313 17-7 PH)
Spacer	Stainless Steel (ASTM A479 316), PTFE optional
Pin	Stainless Steel (ASTM A479 316)
Plug	Steel
Lock Nut	Steel Zinc Plated
Eye Bolt	Steel Zinc Plated
Nameplate	Stainless Steel (SS 316)
Disc	Stainless Steel (ASTM A351 CF8M)
Rivet	Steel Zinc Plated
Disc Nut	Stainless Steel (ASTM F594 316)

Rite® Series Check Valve seat ring type part number: V0215SMZ (For 2", Class 150, Carbon Steel ASTM A216 WCB Body, Metal Seat, SS Spacer, Series 210)

Note: ¹Dimensions available in ASME and DIN sizes.

Figure 05: Seat Ring Hard Seat Close-Up Cutaway Views.

